



WiCOM

Perfect home and office solution



alarm 2 gsm






All in one system

- Door Entry Intercom System
- Access Control System
- House Automation
- Fire & Intruder Protection
- Easy to use

DOOR ENTRY SYSTEM ACCESS CONTROL AND HOUSE AUTOMATION

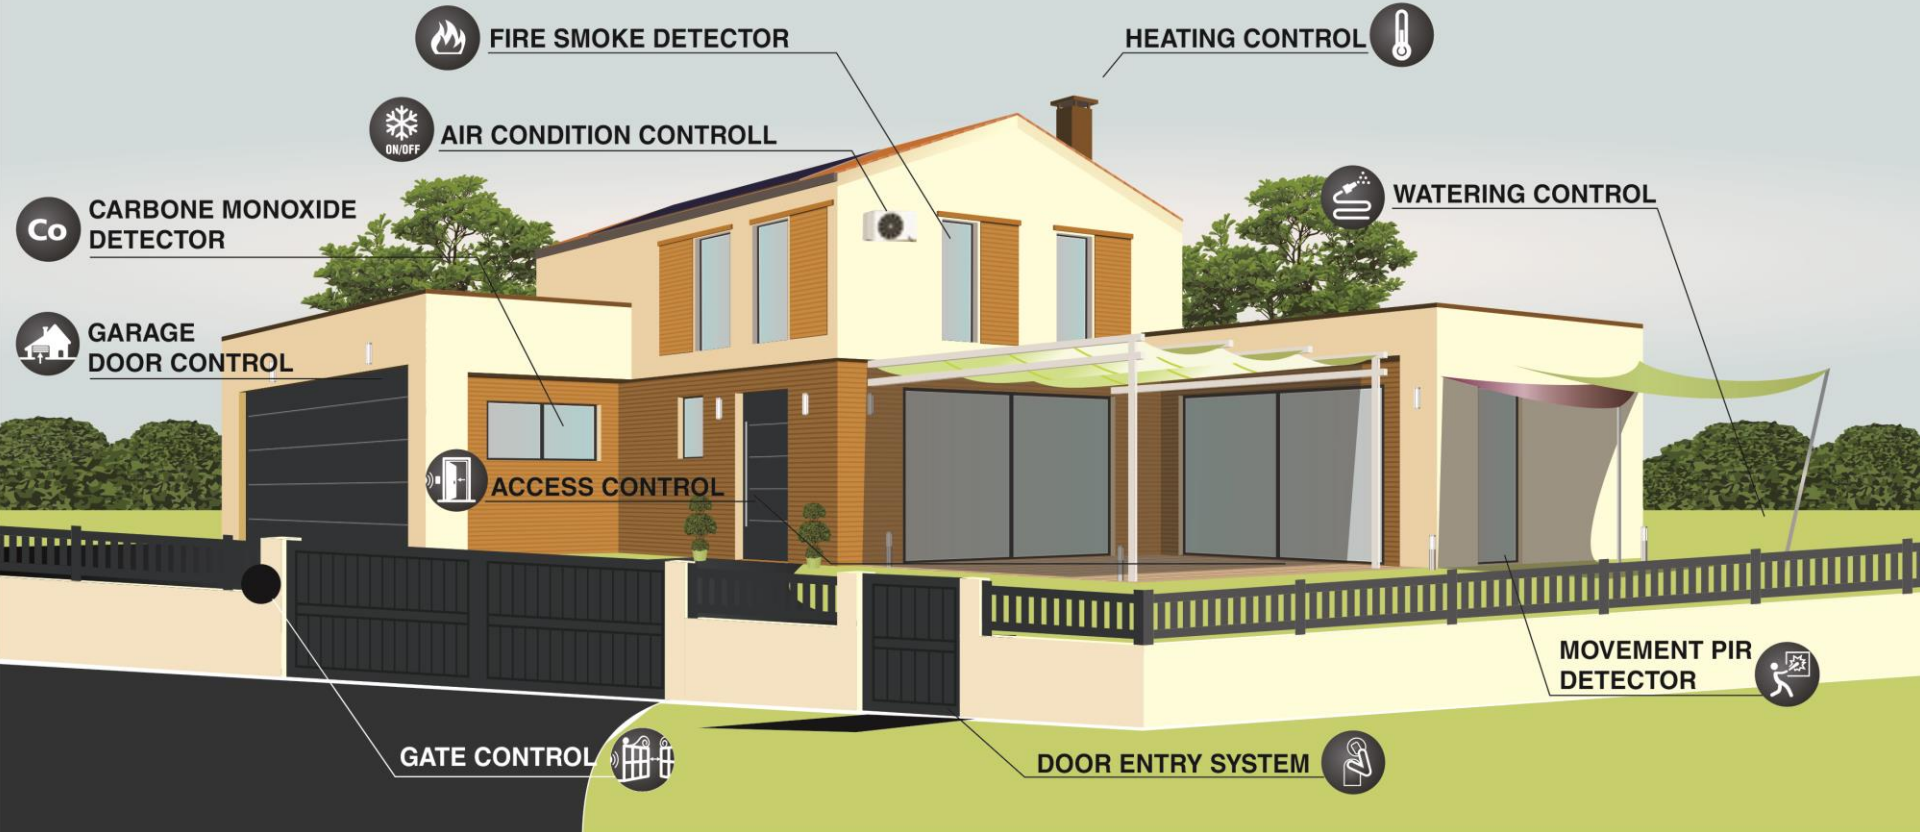



- 10 Year Lithium battery powered
- Suitable for kitchens, areas where smoke alarms may be subjected to false alarms
- 5 Year Guarantee
- Third party accredited by BSI
- IQRF Module built in

● Battery powered **Heat detector**

●



Lithium battery (sealed in)

Easy to use Test and Silence button

Proven electrochemical sensor

Digital display shows CO level & status messages

Loud distinctive alarm 85dBA at 3 metres

IQRF Module built in

5 Year Guarantee

● Battery powered **Carbone monoxide detector** ●



10 Year Lithium battery powered

Large, easy to use Test button

Easy to fit twist-on base

IQRF Module built in

5 Year Guarantee

Tested by VdS to EN14604:2005

Fit in:

Living room, Landing, Hallway

● Battery powered **Smoke detector** ●



Battery powered 2x AAA Battery

IQRF Module built in

-
- Low power **Movement PIR detector**




Fit in:

- Home and Office
- Small Hotels and Guest Houses
- Airbnb Electronic Key
- Greenhouses
- Temperature Management
- Different Automation Control
- Fire and Intruder Protection

GSW2 plus - GSM/GPRS Gateway

TYPICAL CONNECTING DIAGRAM
GSW2 plus - MAIN UNIT
UP TO 4 EXIO 4 - EXTENDING UNITS

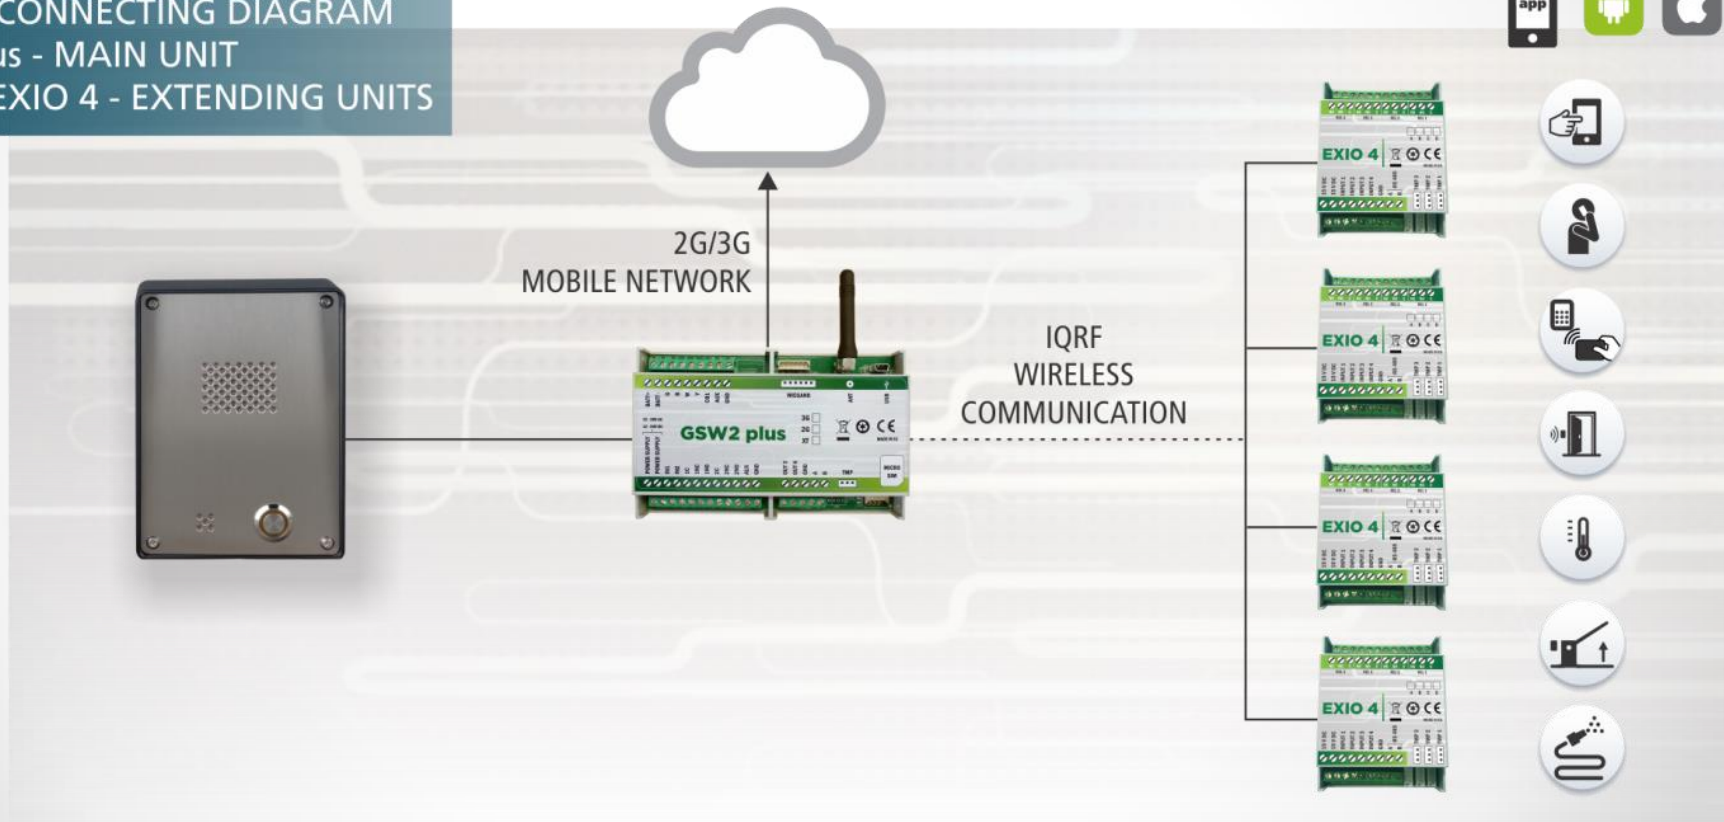



- Set up all features using an unique and simple SMS - text messages or PC program
- Up to 200 users can open an entrance with a free call by Caller ID
- Unique future proof connectivity and integration features: RS 485, USB, WEB programming
- 1.000 Event log entries with timestamps – find out who accessed by phone and when
- Wiegand 26/72 input & output and other optional features like RF module, temp. sensor, ...
- NEW F-OTA function - Upgrade FW of the device Over The Air
- IQRF module built


• GSW2 plus - GSM/GPRS Gateway •



- Extended Input/Output module
- 4 Digital Inputs
- Relay Outputs
- RS485 communication
- 3 temperature probes
- IQRF module built

EXIO 4 - Extended Input/Output module

CASE STUDY - Foaling alarm



GSM ALARM & SMS



RING
RING

